


\*Customer Approval: \_\_\_\_\_ First Article:  Required  Waived



TOLERANCES ARE:  
FRACTIONS-DECIMALS- ANGLES  
+/- X/X +/- 1.00 in. +/- X°

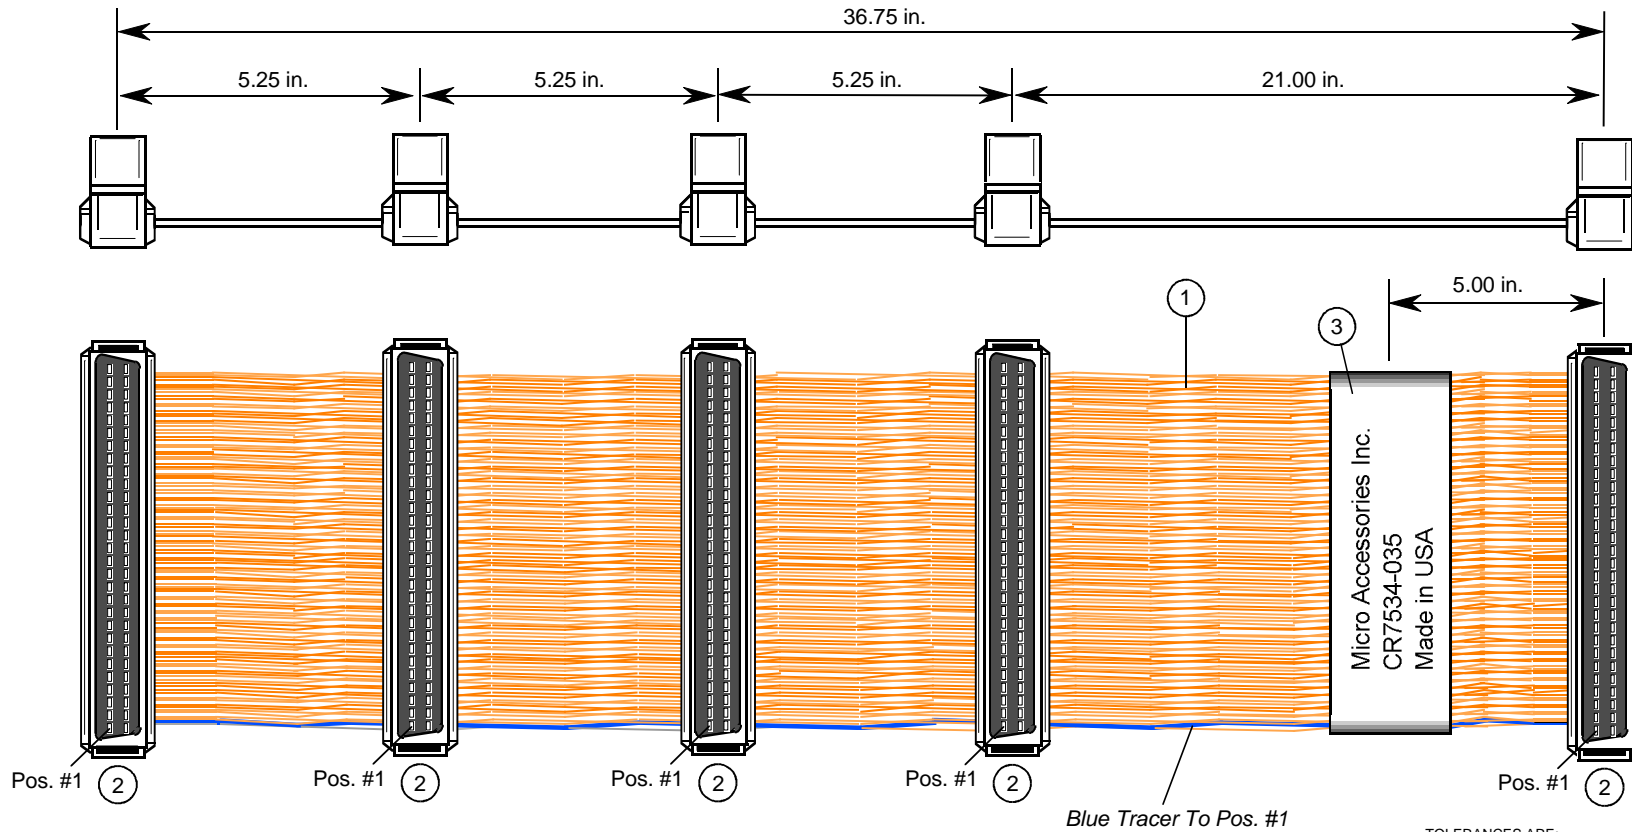

**Note:** • All finished assemblies are to be 100% electrically tested for polarity and continuity.

• Materials			
L/I	Part No.	Description	Quantity
①	125-3011-068	Cable: <b>Amphenol</b> , Twist & Flat, (orange) 68 cond.	A/R
②	786090-7	Connector: <b>AMP</b> , HD68 pos. male.	5
③		Label: Wrap around label, Print Mfg. and cust. P/N.	1

**MICRO ACCESSORIES**  
6086 Stewart Ave.  
Fremont, CA 94538  
Phone  
1.800.777.6687

Rev.	Description of Change	E.C.O. #	Date
B	Changed cable length.	2581	01-08-02

M.A. Illustration No. <b>CR7534-035</b>	Initial Release Date: 02-15-2000
Customer Part No.	Cust. Rev.: <b>N/A</b>

Description: Internal Cable Assembly:  
(5) HD68 pos. male. 36.75 in.

Technical Illustrator: <b>RICHARD OLSEN</b>	E.C.O. # <b>2581</b>
--	-------------------------

**APPROVED**  
Rev. Date: 01-08-2002

Approval Date: 01-09-2002	M.A. Rev.: <b>B</b>
------------------------------	---------------------

\*If this specification is approved and the first article waived, then the responsibility for fitness of the product is accepted by the customer (provided the product complies with this spec.).