


*Customer Approval: _____ First Article: Required Waived

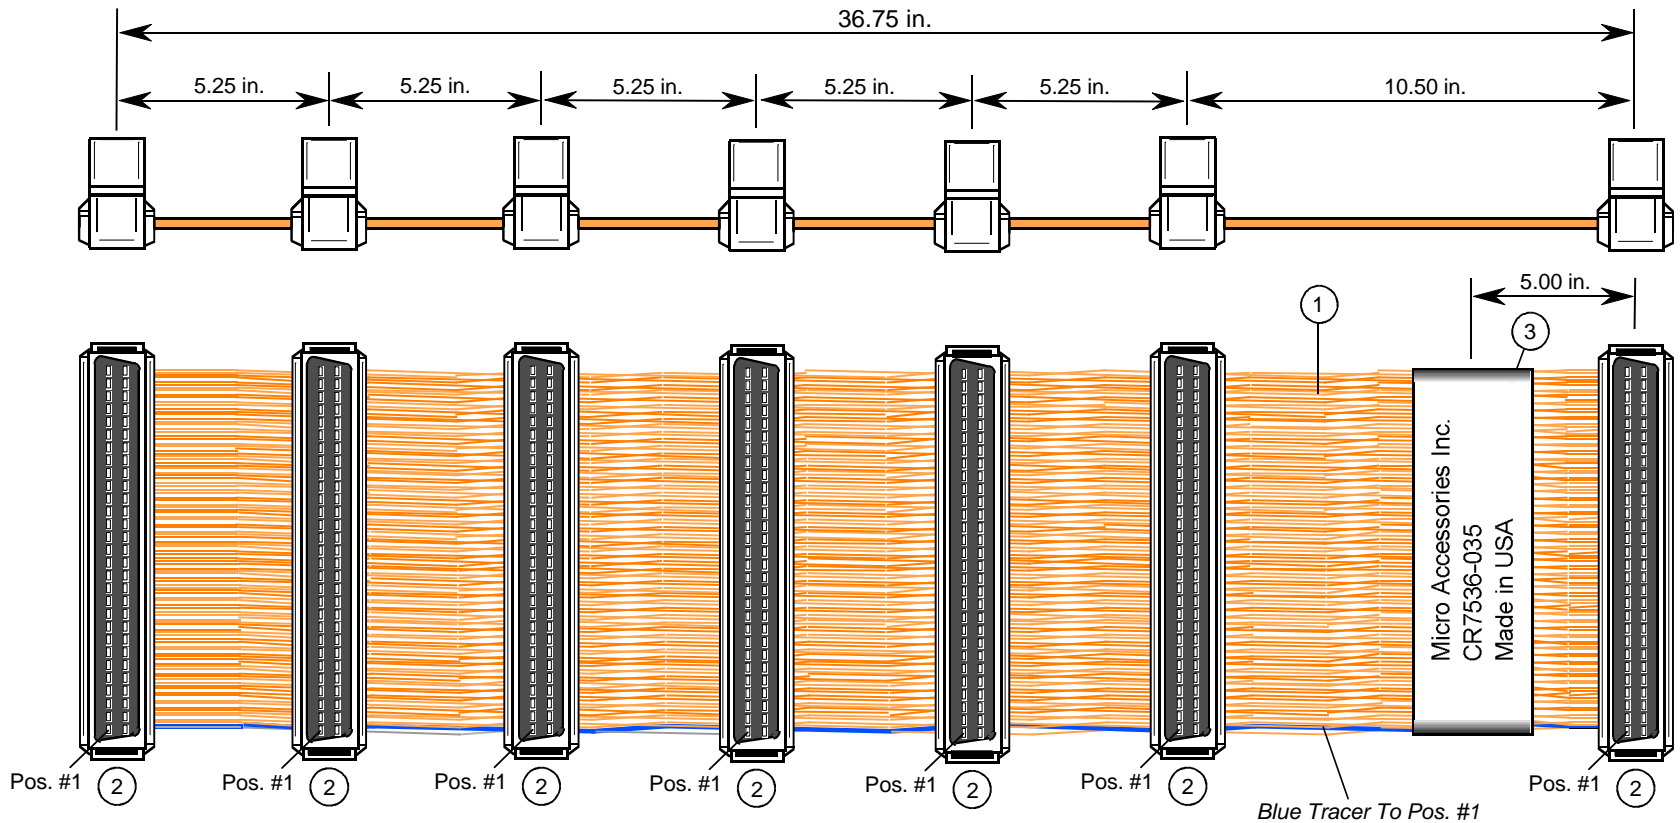

TOLERANCES ARE:
FRACTIONS-DECIMALS- ANGLES
+/- X/X +/- 1.00 in. +/- X°

Note: • All finished assemblies are to be 100% electrically tested for polarity and continuity.

• Materials			
L/I	Part No.	Description	Quantity
①	125-3011-068	Cable: Amphenol , Twist & Flat, (orange) 68 cond.	A/R
②	786090-7	Connector: AMP , HD68 pos. male.	7
③		Label: Wrap around label, Print Mfg. and cust. P/N.	1

MICRO ACCESSORIES

6086 Stewart Ave.
Fremont, CA 94538
Phone
1.800.777.6687

Rev.	Description of Change	E.C.O. #	Date
B	Corrected illustration number.	1592	2-17-00
C	Changed cable length.	2580	01-08-02

M.A. Illustration No. CR7536-035	Initial Release Date: 02-15-2000
Customer Part No.	Cust. Rev.: N/A
Description: Internal Cable Assembly: (7) HD68 pos. male. 36.75 in.	
Technical Illustrator: RICHARD OLSEN	E.C.O. # 2580
APPROVED	Rev. Date: 01-08-2002
Approval _____ Date 01-09-2002	M.A. Rev.: C

*If this specification is approved and the first article waived, then the responsibility for fitness of the product is accepted by the customer (provided the product complies with this spec.).