


\*Customer Approval: \_\_\_\_\_ First Article:  Required  Waived



TOLERANCES ARE:  
FRACTIONS-DECIMALS- ANGLES  
+/- XX +/- 1.00 in. +/- X°

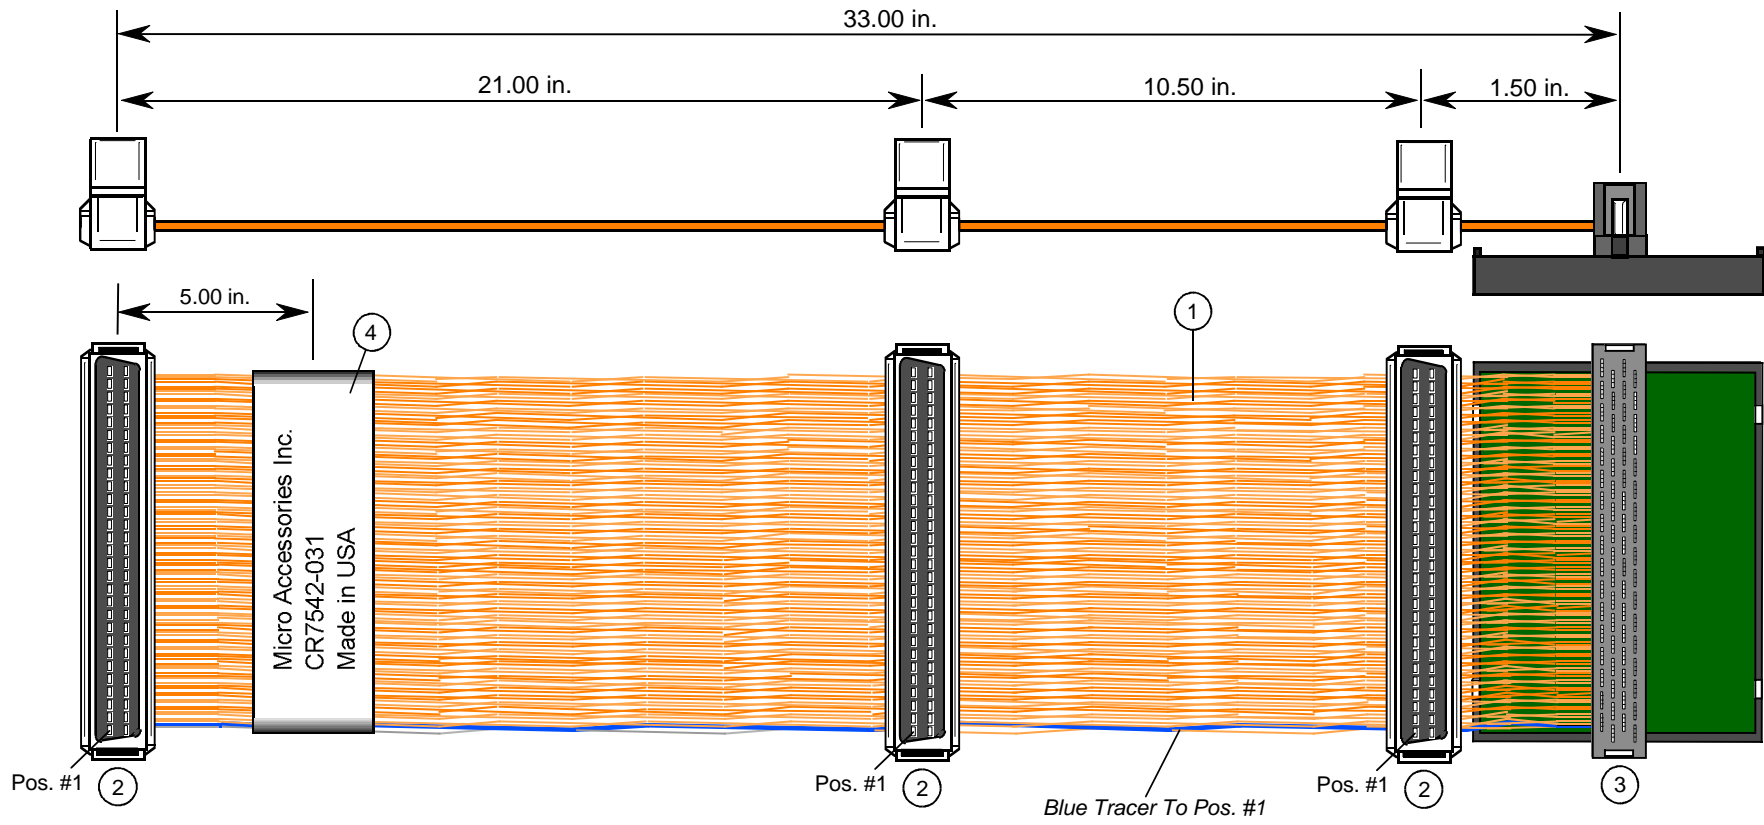

**Note:** • All finished assemblies are to be 100% electrically tested for polarity and continuity.

• Materials			
L/I	Part No.	Description	Quantity
①	125-3011-068	Cable: <b>Amphenol</b> , Twist & Flat, (orange) 68 cond.	A/R
②	786090-7	Connector: <b>AMP</b> , HD68 pos. male.	3
③	AP68/160/C/LVD/SE	Terminator: <b>M.A.</b> , ULTRA 160/SE crimp style.	1
④		Label: Wrap around label, Print Mfg. and cust. P/N.	1

**MICRO ACCESSORIES**  
6086 Stewart Ave.  
Fremont, CA 94538  
Phone  
1.800.777.6687

Rev.	Description of Change	E.C.O. #	Date
B	Changed cable length.	2576	01-08-02

M.A. Illustration No. <b>CR7542-031</b>	Initial Release Date: 02-15-2000
Customer Part No.	Cust. Rev.: <b>N/A</b>

**Description:** Internal Cable Assembly:  
(3) HD68 pos. male, (1)Terminator. 33.00 in.

Technical Illustrator: <b>RICHARD OLSEN</b>	E.C.O. # <b>2576</b>
<b>APPROVED</b>	Rev. Date: 01-08-2002
Approval _____ Date 01-09-2002	M.A. Rev: <b>B</b>

\*If this specification is approved and the first article waived, then the responsibility for fitness of the product is accepted by the customer (provided the product complies with this spec.).