


*Customer Approval: _____ First Article: Required Waived

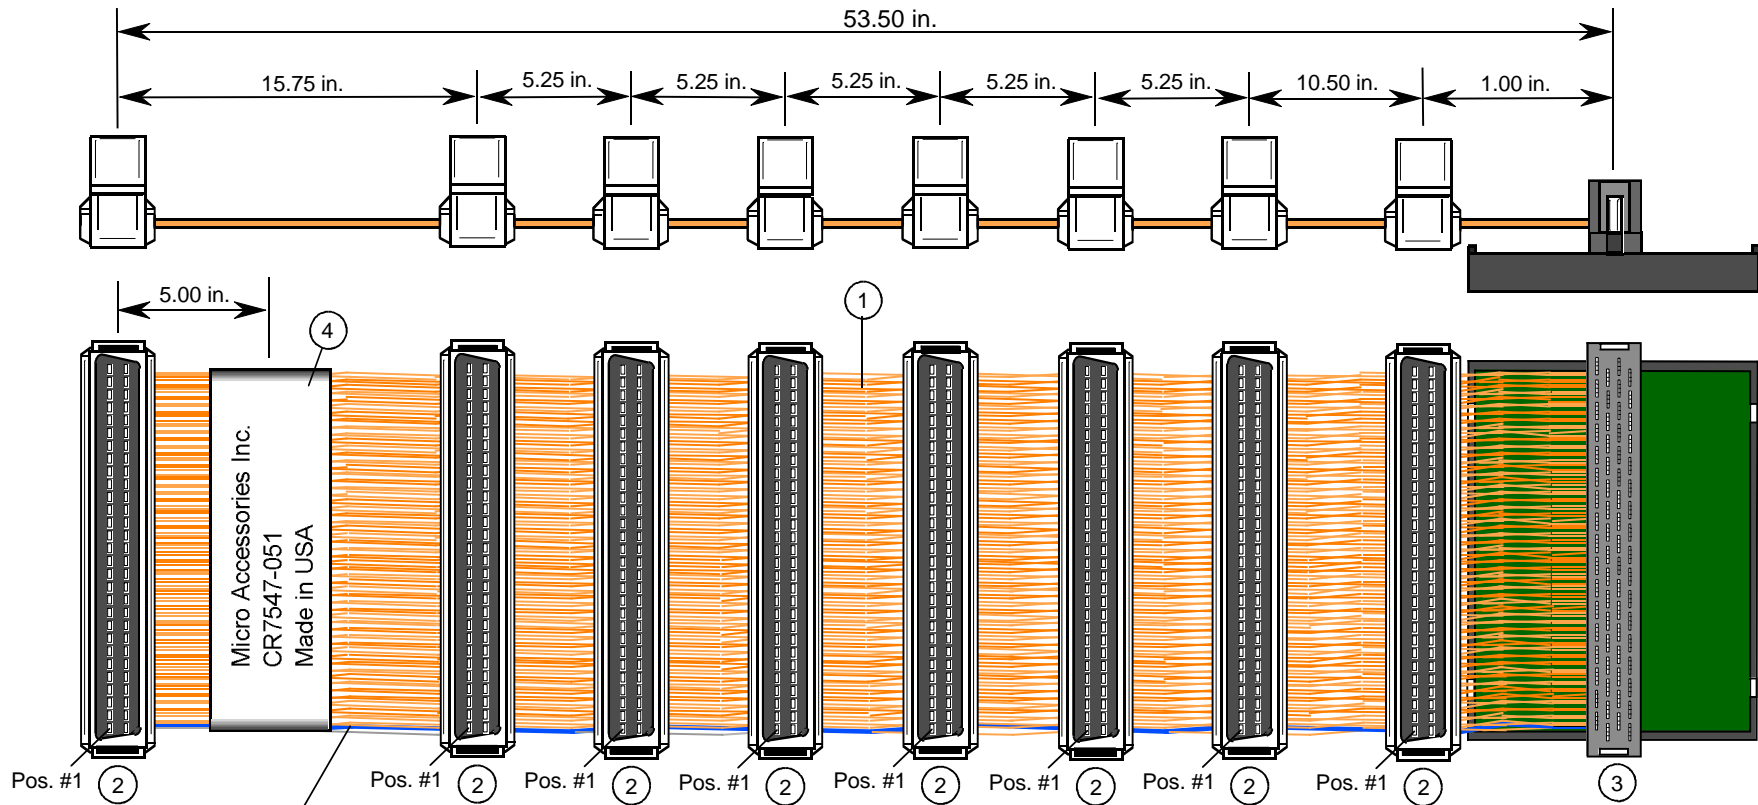

Blue Tracer To Pos. #1

TOLERANCES ARE:
FRACTIONS-DECIMALS- ANGLES
+/- X/X +/- 1.00 in. +/- X°

Note: • All finished assemblies are to be 100% electrically tested for polarity and continuity.

• Materials			
L/I	Part No.	Description	Quantity
①	125-3011-068	Cable: Amphenol , Twist & Flat, (orange) 68 cond.	A/R
②	786090-7	Connector: AMP , HD68 pos. male.	8
③	AP68/160/C/LVD/SE	Terminator: M.A. , ULTRA 160/SE crimp style.	1
④		Label: Wrap around label, Print Mfg. and cust. P/N.	1




6086 Stewart Ave.
Fremont, CA 94538
Phone
1.800.777.6687

Rev.	Description of Change	E.C.O. #	Date
B	Corrected illustration number.	1586	2-16-00
C	Changed cable length.	2583	01-08-02

M.A. Illustration No. **CR7547-051** Date: 02-16-2000

Customer Part No. _____ Cust. Rev.: **N/A**

Description: Internal Cable Assembly:
(8) HD68 pos. male, (1) Terminator. 53.50 in.

Technical illustrator: **RICHARD O'NEALS** E.C.O. # **2583**

APPROVED Rev. Date: 01-08-2002

Approval _____ M.A. Rev: **C**
Date 01-09-2002

*If this specification is approved and the first article waived, then the responsibility for fitness of the product is accepted by the customer (provided the product complies with this spec.).