


*Customer Approval: _____ First Article: Required Waived

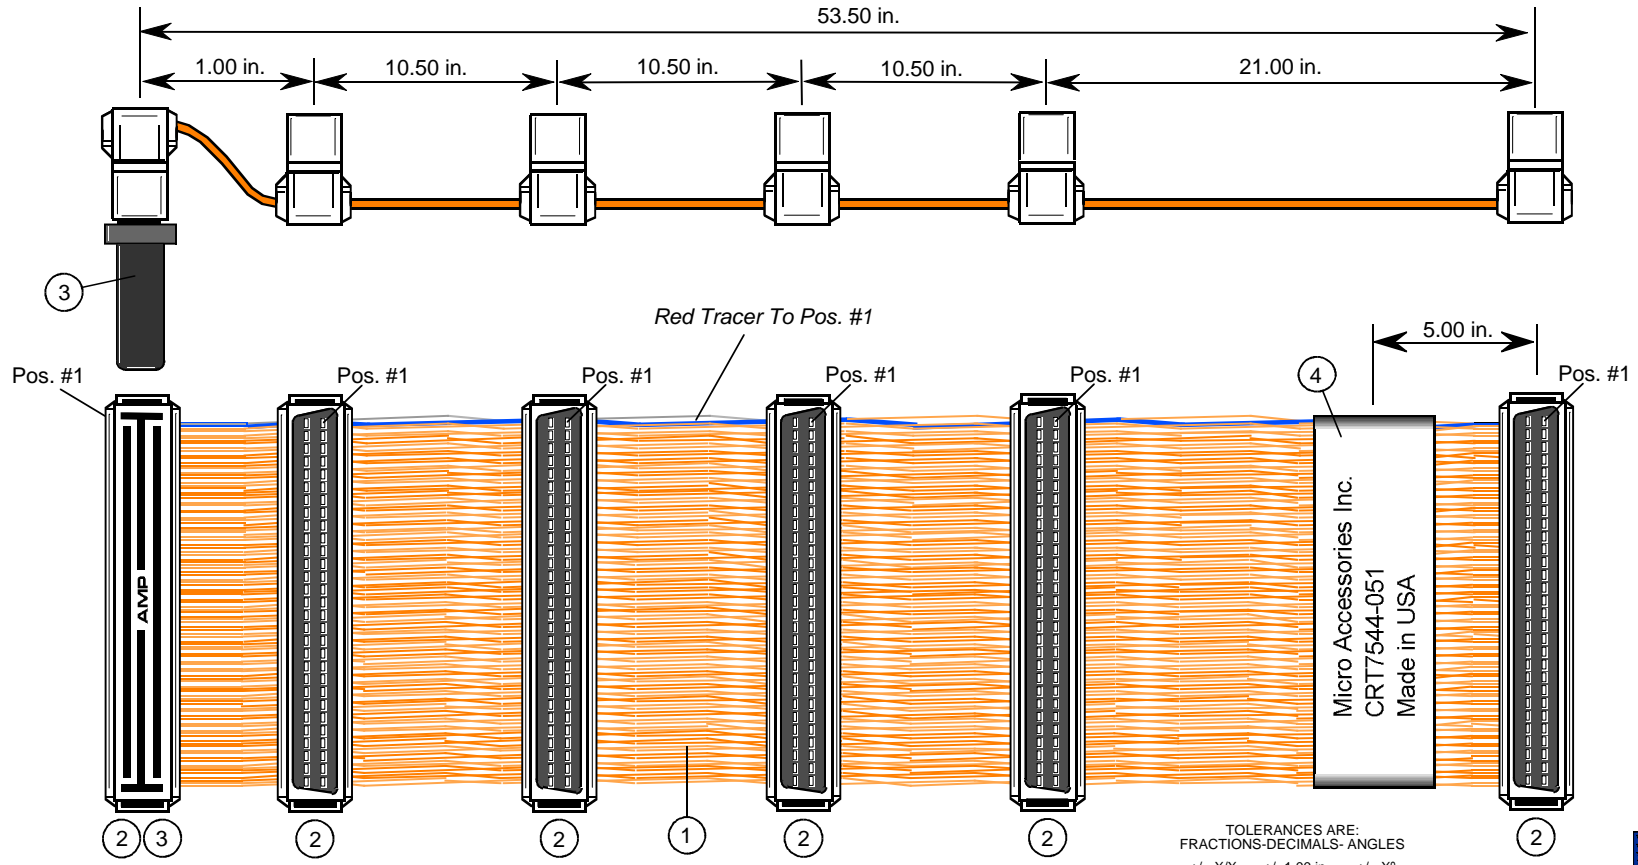

TOLERANCES ARE:
 FRACTIONS-DECIMALS- ANGLES
 +/- X/X +/- 1.00 in. +/- X°

Note: • All finished assemblies are to be 100% electrically tested for polarity and continuity.

• Materials			
L/I	Part No.	Description	Quantity
①	125-3011-068	Cable: Amphenol , Twist & Flat, (orange) 68 cond.	A/R
②	786090-7	Connector: AMP , HD68 pos. male.	6
③	AP68/160/LVD/SE	Terminator: M.A. , Ulta 160/SE, 68F.	1
④		Label: Wrap around label, Print Mfg. and cust. P/N.	1



6086 Stewart Ave.
 Fremont, CA 94538
 Phone
 1.800.777.6687

Rev.	Description of Change	E.C.O. #	Date
B	Changed cable length.	2575	01-08-02
M.A. Illustration No. CRT7544-051		Initial Release Date: 02-17-2000	
Customer Part No.		Cust. Rev.: N/A	
Description: Internal Cable Assembly: (6) HD68 pos. male, (1) Terminator. 53.50 in.			
Technical Illustrator: RICHARD OLIVERES		E.C.O. # 2575	
APPROVED		Rev. Date: 01-08-2002	
Approval _____ Date 01-09-2002		M.A. Rev: B	

*If this specification is approved and the first article waived, then the responsibility for fitness of the product is accepted by the customer (provided the product complies with this spec.).