


*Customer Approval: _____ First Article: Required Waived

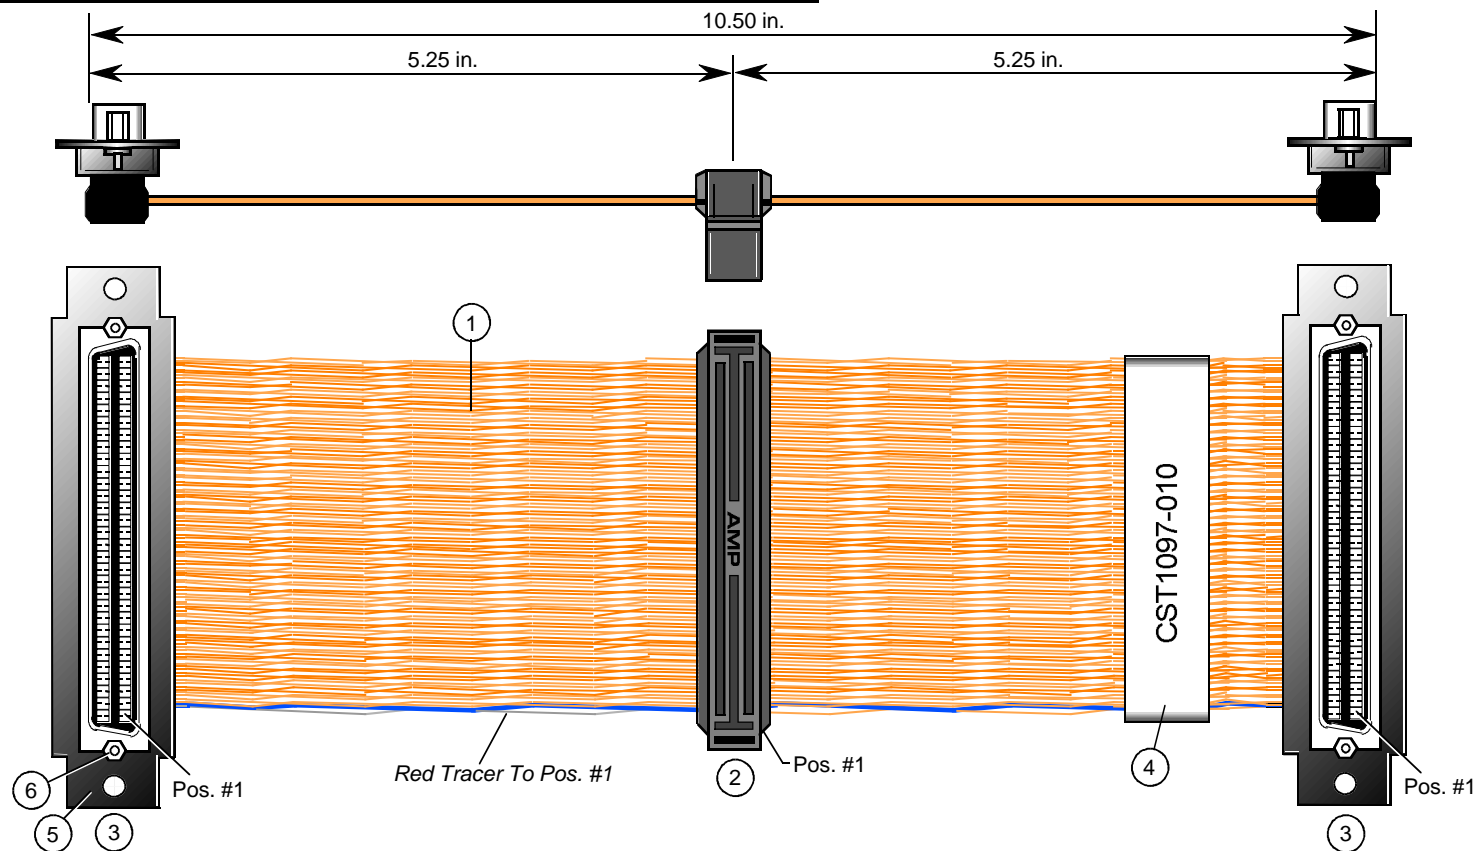

TOLERANCES ARE:
 FRACTIONS-DECIMALS- ANGLES
 +/- X/X +/- .50 in. +/- X°

Note: • All finished assemblies are to be 100% electrically tested for polarity and continuity.

• Materials			
L/I	Part No.	Description	Quantity
①	125-3011-068	Cable: Amphenol , Twist & Flat, 68 cond. (Orange).	A/R
②	786090-7	Connector: AMP or equiv. , HD68 pos. male.	1
③	390378-7	Connector: AMP or equiv. , HD68 pos. female.	2
④		Label: Print, P/N: CST1097-010.	1
⑤	HD68BRKT-2	Bracket: C50 bracket to mount HD68 female.	2
⑥	STANDOFF1	Hex Screw: 4/40 - 2/56.	4

6086 Stewart Ave.
 Fremont, CA 94538
 Phone
 1.800.777.6687

Rev.	Description of Change	E.C.O. #	Date
B	Added customer p/n and rev.	2030	8-28-00
C	Changed ill. p/n, added brackets and or equiv.	2151	1-10-01
D	Removed customer name.	2524	11-14-01
E	Changed female connector p/n.	2584	01-09-02

M.A. Illustration No. **CST1097-010** Date: 07-12-2000

Customer Name: _____ Cust. Rev.: **N/A**

Description: Internal Cable Assembly:
 (2) HD68 pos. female, (1) HD68 pos. male. 10.50 in.

Technical illustrator: **RICHARD OLSEN** E.C.O. # **2584**

APPROVED Rev. Date: 01-09-2002

Approval _____ Date: 01-09-2002 M.A. Rev: **E**

*If this specification is approved and the first article waived, then the responsibility for fitness of the product is accepted by the customer (provided the product complies with this spec.).