



*Customer Approval: _____ First Article: Required Waived

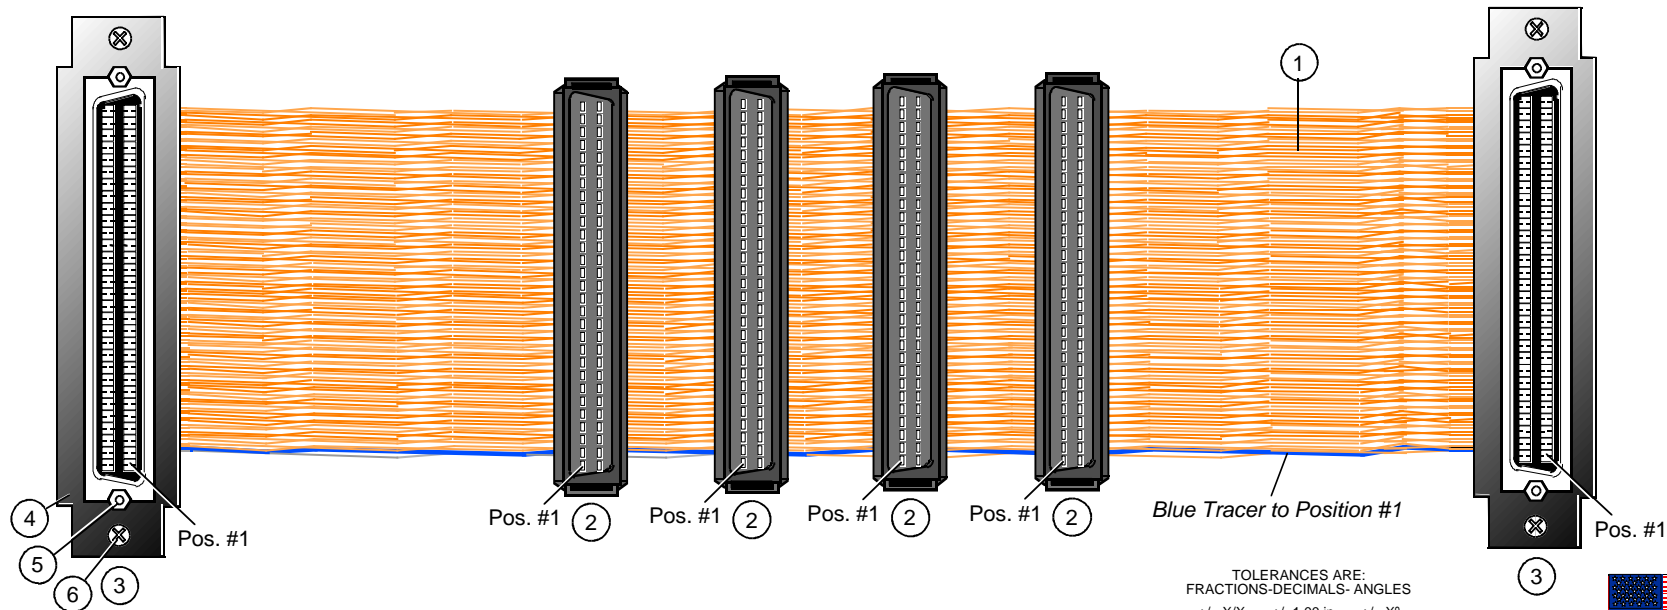

TOLERANCES ARE:
FRACTIONS-DECIMALS- ANGLES
+/- X/X +/- 1.00 in +/- X°

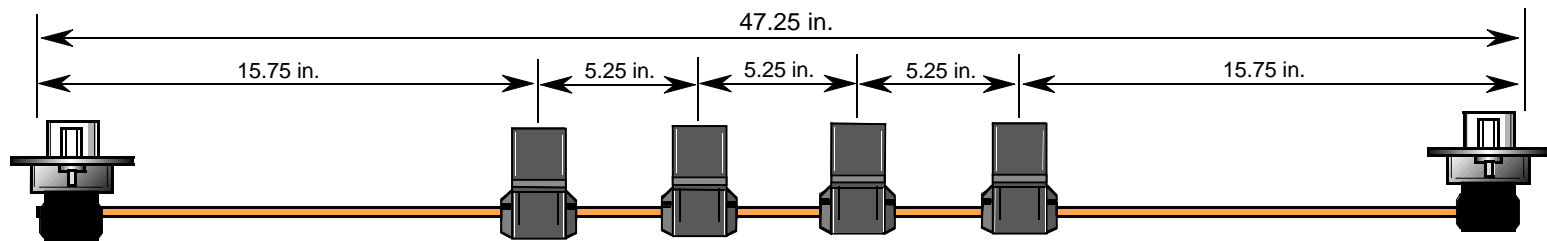

Note: • All finished assemblies are to be 100% electrically tested for polarity and continuity.

• Materials			
L/I	Part No.	Description	Quantity
①	125-3011-068	Cable: Amphenol , Twist & Flat, (orange), 68 cond.	A/R
②	786090-7	Connector: AMP or equiv. , HD68 pos. male.	4
③	390378-7	Connector: AMP or equiv. , HD68 pos. female.	2
④	HD68BRKT-2	Bracket: 68 pos..	2
⑤	STANDOFF1	Hex screw: 4/40 - 2/56.	4
⑥		Mounting screw: 2x4/40x0.5.	4

MICRO ACCESSORIES
6086 Stewart Ave.
Fremont, CA 94538
Phone
1.800.777.6687

Rev.	Description of Change	E.C.O. #	Date
B	Changed cable length.	2586	01-08-02
M.A. Illustration No. CST2074-045		Initial Release Date: 01-11-2001	
Customer Part No.		Cust. Rev.: N/A	
Description: Internal Cable Assembly: (4) HD68 pos. male, (2) HD 68 pos. female. 47.25 in.			
Technical illustrator: RICHARD OLSEN		E.C.O. # 2586	
APPROVED		Rev. Date: 01-09-2002	
Approval _____ Date 01-09-2002		M.A. Rev.: B	

*If this specification is approved and the first article waived, then the responsibility for fitness of the product is accepted by the customer (provided the product complies with this spec.).